




Remote Setup Schematic

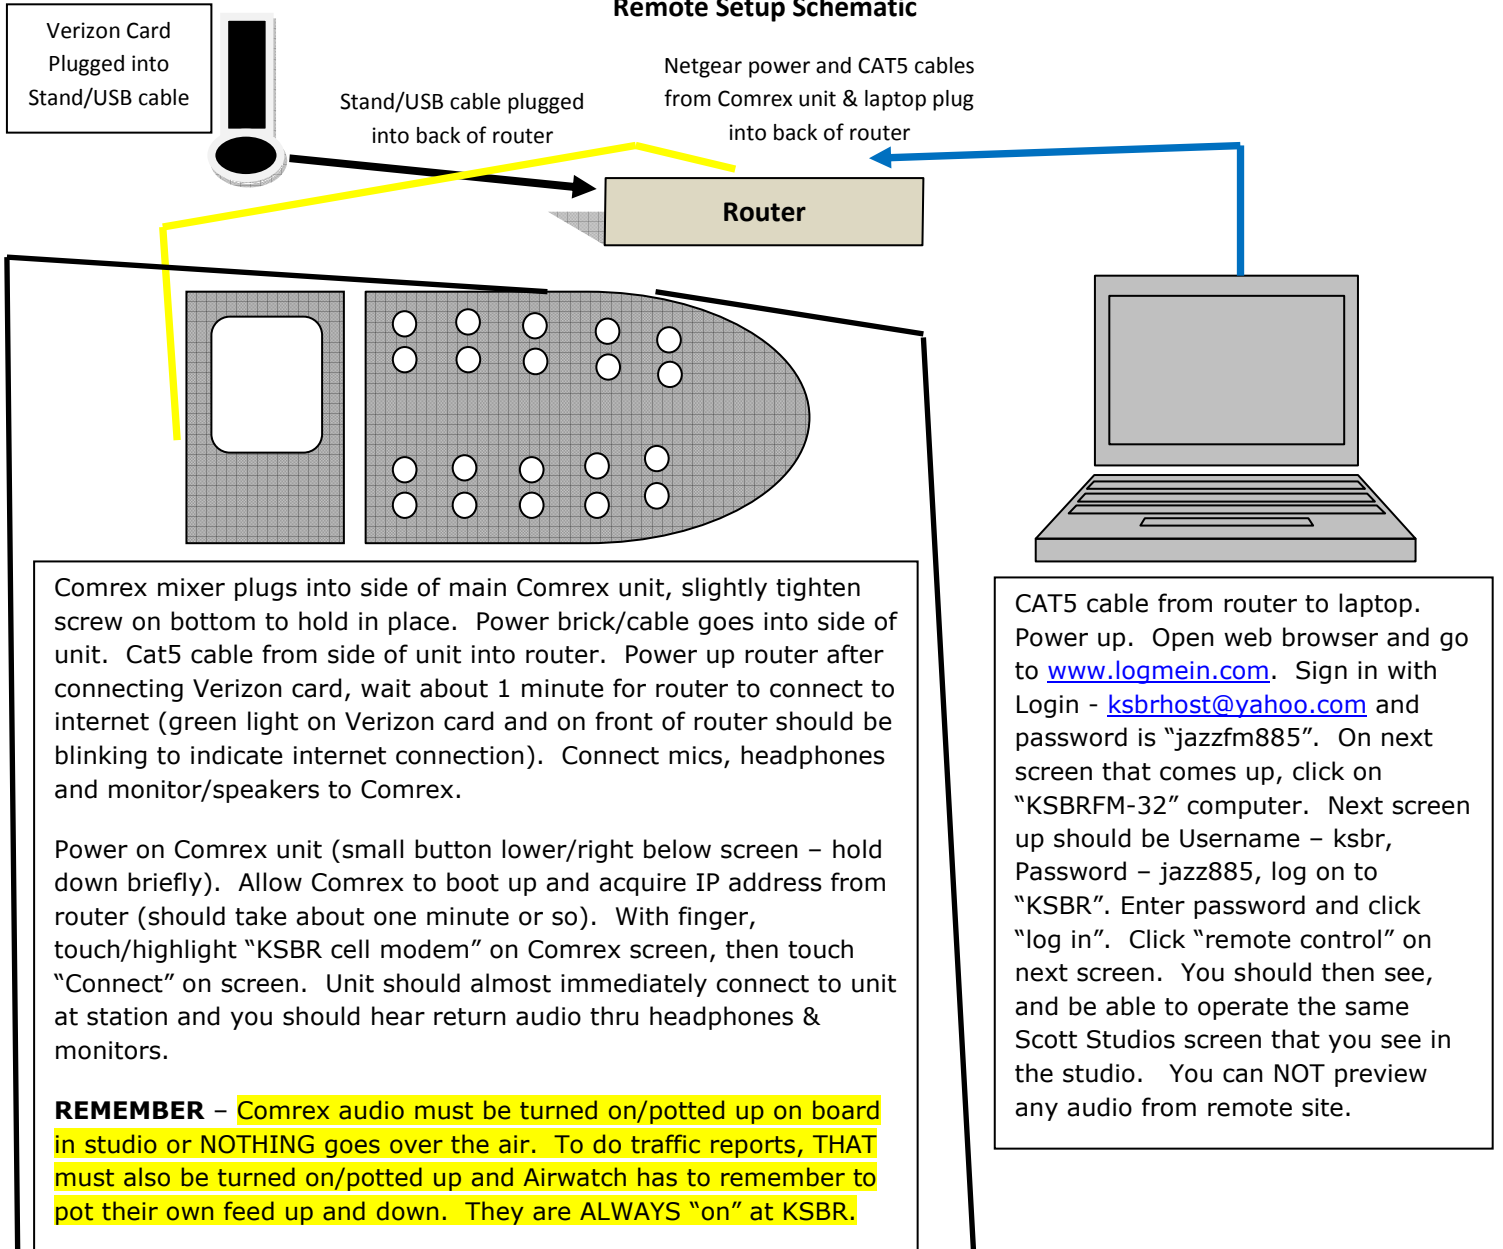

Power, speaker wire and cable to connect to Comrex unit all in plastic zip-lock bag in tool case. Run "RCA" to ¼" cable from back of monitor to headphone #5 jack on Comrex unit. Remember to turn monitors OFF when mic is on. Volume controlled by "Return" volume on Comrex. Have "Local" volume turned down all the way.

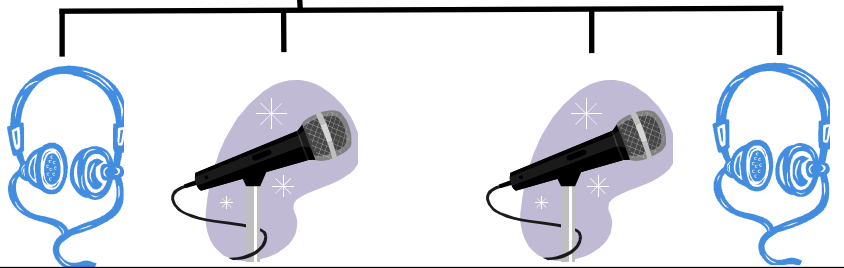

Mic's and headphones plug into Comrex mixer. Each mic channel has small mic/line switch that MUST be in "mic" position. Each headphone channel has two volume controls, the top 2 rows of pots - "Return" (audio from station – with slight delay) and "Local" (audio from remote in real time). Each mic channel has two pots, one for volume the other for "pan". Volume should be potted up to about 1:00 position. Pan should be in center (12:00 position)